

Rental Power 250 and 350 kW



> Specification sheet

Our energy working for you.™



Description

This Cummins Power Generation rental package is a fully integrated mobile power generation system, providing optimum performance, reliability and versatility for standby and prime power applications.



This generator set is designed in facilities certified to ISO9001 and manufactured in facilities certified to ISO9001 or ISO9002.



All low voltage models are CSA certified to product class 4215-01.



The Cascade controller is Listed to UL508 - Category NITW7 for U.S. and Canadian usage. Circuit breaker assemblies are UL489 Listed for 100% continuous operation.

U.S. EPA

Certified to U.S. EPA Mobile Off-Highway Standards.

Features

Cummins diesel engines

- Lightweight, compact, and excellent fuel economy.
- Operate at up to 45° C (113° F) with no effect on output.
- Equipped with heavy duty air cleaners and bypass-type oil filters.
- Equipped with electronic governor.
- Includes jacket water heater for more reliable operation in emergency standby applications.

Engine controls

- The most advanced, reliable, and capable generator set control system available in the market today.
- Integrated generator set governing, voltage regulation, protection, and paralleling functionality in one easy-to-operate customer interface.
- Multiple units and grid paralleling capable.
- Remote monitoring and operation ready.
- Integrated ground fault indication.
- Optional freestanding, electronically operated, closed-transition transfer switches are available.
- Both digital and analogue display of key operating parameters.

Stamford alternators

- Designed and built by Cummins Power Generation.
- Paralleling capable and voltage reconnectable (208/480 VAC of 750 kW model)
- Oversized alternators for improved motor starting and low temperature rise in prime and continuous applications.
- Permanent magnet excitation for improved performance in cyclic and non-linear load applications.
- 12-lead alternator for quick reconnection to a wide array of voltages.

Model	kW rating		Cummins engine model	Sound level dBa @7m	Generator specification sheet #	Hours of operation (75% Load)	
	Standby	Prime				Standby	Prime
DQAB	250	225	MTA11-G2	75	S-1140 60Hz	24	26
DQBB	350	315	N14-G2	75	S-1154 60Hz	17	19

Electrical features

- Multiple voltage capability (480/277 VAC/3 phase/Wye or 208/120 VAC/3 phase/Wye or 240/120 VAC/3 phase delta).
- Automatic paralleling capability (5-cycle closure motor operated industrial circuit breaker).
- Convenient side-mounted load connections provide:
 - Horizontal staggered bus bars.
 - 3 x 400 Amp Cam-Lok® connectors (per-phase).
 - 3 x 240 V/1 phase/50 Amp twist-lock receptacles.
- External connection to the PowerCommand® for auto/remote start, paralleling, networking and load sharing.
- Shore power distribution panel provides power for:
 - Jacket water heater (240 VAC).
 - Battery charger.
 - 120 VAC GFI-protected receptacles.
- Battery disconnect switch.
- Safety shutoff switch on load connection access door.
- Low fuel level and retention tank fluid detection alarms.

Base frame/fuel tank

Structural steel oil-field style base including:

- Fork lift pockets.
- Single point lifting arch.
- External fuel port with "push to read" remote fuel gauge to facilitate fuel tank filling.
- 4" x 2" square mounting fixtures (for distribution equipment and convenience panels).
- Grip-strut steps at both ends.
- 4" pass-through tubes at both ends.
- Complete fluid containment reservoir for engine fluids.
- NFPA 30 compliant fuel tank design.
- UL 142 Listed dual wall fuel tank with:
 - Vented retention tank.
 - Retention tank fluid detection alarm.
 - Low fuel level alarm.
 - Vertically extended normal vents to ensure complete filling without spillage.
 - Fittings for AFTS (Automatic Fuel Transfer System)

Control System



Optional Features Shown

PowerCommand control with AmpSentry™ protection

- Integrated automatic voltage regulator and engine speed governor
- AmpSentry protection guards the electrical integrity of the alternator and power system from the effects of overcurrent, over/under voltage, under frequency and overload conditions
- Control components designed to withstand the vibration levels typical in generator sets

Standard control description

- | | |
|---|--|
| <ul style="list-style-type: none"> • Analog % of current meter (amps) • Analog AC frequency meter • Analog AC voltage meter • Analog % of load meter (kW) • Cycle cranking control • Digital display panel • Emergency stop switch • Idle mode control • Menu switch | <ul style="list-style-type: none"> • Panel backlighting • Remote starting, 12 volt, 2 wire • Reset switch • Run-off-auto switch • Sealed front panel, gasketed door • Self diagnostics • Separate customer interconnection box • Voltmeter/Ammeter phase selector switch |
|---|--|

Standard protection functions		Standard performance data
<p>Warnings</p> <ul style="list-style-type: none"> • High coolant temperature • High DC voltage • Low coolant temperature • Low DC voltage • Low oil pressure • Over current • Oil pressure sender fault • Overload load shed contacts • Temperature sender fault • Up to four customer fault inputs • Weak battery 	<p>Shutdowns</p> <ul style="list-style-type: none"> • Emergency stop • Fail to crank • High AC voltage • High coolant temperature • Low coolant level (option for alarm only) • Low AC voltage • Low oil pressure • Magnetic pickup failure • Overcrank • Overcurrent • Overspeed • Short circuit • Underfrequency 	<p>AC alternator data</p> <ul style="list-style-type: none"> • Current by phase • Kilowatts • Kilowatt hours • Power factor • Voltage line to line • Voltage line to neutral <p>Engine data</p> <ul style="list-style-type: none"> • Battery voltage • Coolant temperature • Engine running hours • Engine starts counter • Oil pressure • Oil temperature • RPM

Our energy working for you.™

www.cumminspower.com

©2007 | Cummins Power Generation | Specifications Subject to Change Without Notice
 Cummins and PowerCommand are registered trademarks of Cummins Inc. AmpSentry is a trademark of Cummins Inc.
 S-1285f (3/07)



Ratings definitions

Standby:


Applicable for supplying emergency power for the duration of normal power interruption. No sustained overload capability is available for this rating. Nominally rated. (Equivalent to Fuel Stop Power in accordance with ISO3046, AS2789, DIN6271, and BS5514.)

Prime (unlimited running time):

Applicable for supplying power in lieu of commercially purchased power. Prime power is the maximum power available at a variable load for an unlimited number of hours. A 10% overload capability is available for limited time. Nominally rated. (Equivalent to Prime Power in accordance with ISO8528 and Overload Power in accordance with ISO3046, AS2789, DIN6271, and BS5514.)

Base load (continuous)

Applicable for supplying power continuously to a load for this rating. Nominally rated. Consult authorized distributor for rating. (Equivalent to Continuous Power in accordance with ISO8528, ISO3046, AS2789, DIN6271, and BS5514.)

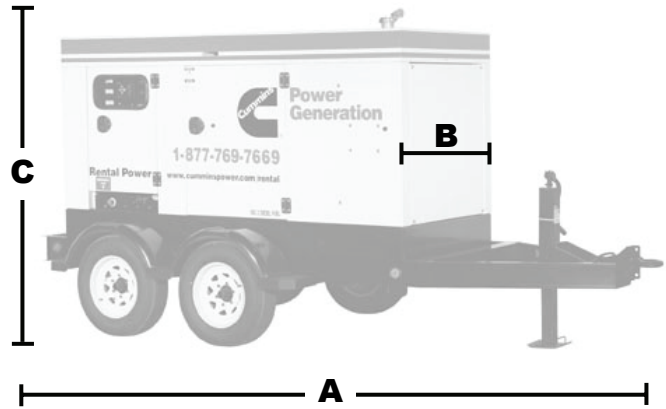

Dimensions

Model	Dim "A" mm (in.)	Dim "B" mm (in.)	Dim "C" mm (in.)	Weight w/o fuel kg (lbs)	Weight with fuel kg (lbs)	Fuel capacity liters (gal)
DQAB	5486 (216)	1676 (66)	2515 (99)	5815 (12820)	6819 (15035)	1040 (275)
DQBB	5486 (216)	1676 (66)	2515 (99)	6532 (14400)	7536 (16615)	1040 (275)

Note: All weights and dimensions are without trailer.

Cummins Power Generation

1400 73rd Avenue N.E.
 Minneapolis, MN 55432 USA
 Telephone: (763) 574-5000
 USA Toll-free: (877) 769-7669
 Fax: (763) 574-5298

Our energy working for you.™

www.cumminspower.com

©2007 | Cummins Power Generation | Specifications Subject to Change Without Notice
 Cummins and PowerCommand are registered trademarks of Cummins Inc. AmpSentry is a trademark of Cummins Inc.
 S-1285f (3/07)

